



## DPI WL-Series

1-port Power Over Ethernet

DPI-1830WL DPI-2430WL DPI-3630WL DPI-4830WL DPI-5230WL


Limited Power 30W - Rated Data Transfer 10/100 Mbps

# آداپتور شبکه (پاور اینجکتور) تک پورت

## سری ۳۰ وات



### Single Port 30W Midspan POE Series

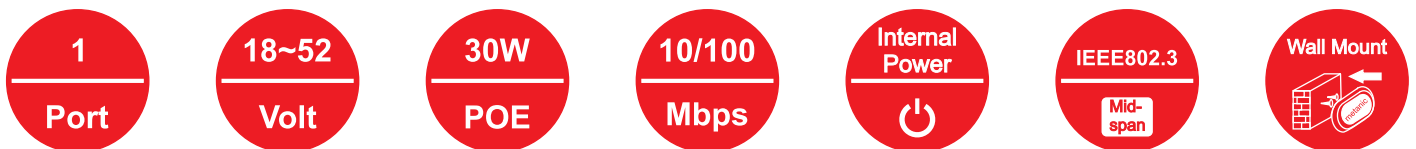

### Specifications

Product		Single Port Adaptor POE				
Model		DPI-1830W	DPI-2430W	DPI-3630W	DPI-4830W	DPI-5230W
Midspan	Data Port	1-Port				
	Connector Type	RJ-45				
	Data Rate	10/100 Mbps				
	Protocol	Base-T, Ethernet802.3 10 IEEE Base-T, Ethernet802.3 100 IEEE				
	Network Cabling	1 x 10/100/1000 Base-T RJ-45 Input Port 1 x 10/100/1000 Base-T RJ-45 PoE Output Port 10Base-T 4Pair UTP Cat.5 Up to 100m (328f) 100Base-T 4Pair UTP Cat.5 Up to 100m (328f) EIA/TIA-568 100-ohm STP(100m)				
Data+POE	POE Port	1-Port				
	Nominal Voltage	18 Volt	24 Volt	36 Volt	48 Volt	52Volt
	Protocol / Mode	IEEE802.3 Mid-Span				
	Connector Type	RJ-45				
Power	Input Voltage	100 ~ 265 V-A.C ( 50/60 Hz)				
	Power Connector	IEC-320-C14 or KF45				
	Max. Power	30W				
Protection	Over Voltage / Overload	Protection type : shutdown o/p voltage, repower on recover				
	Over Temperature	shutdown o/p voltage, recovers automatically after temperature goes down				
Physical	Weight(g)	230g				
	Dimension(WxDxH)mm	W: 55+20mm x D: 33mm x H: 150mm				